


ARCH SERIES P/N 70535

Natural frequency	7-10 HZ	
Transmissibility at resonance	7 - 3.5	
Axial/Radial frequency ratio	2:1 approx.	
Resilient element	Elastomer	
Metal parts	Steel	
Operating temperature	- 20° F to +180° F	
P/N	Static Weight	Max. Shock Deflection
70535-1 70535-2 70535-3 70535-4	100 lbs 150 lbs. 200 lbs. 250 lbs.	2.0"+

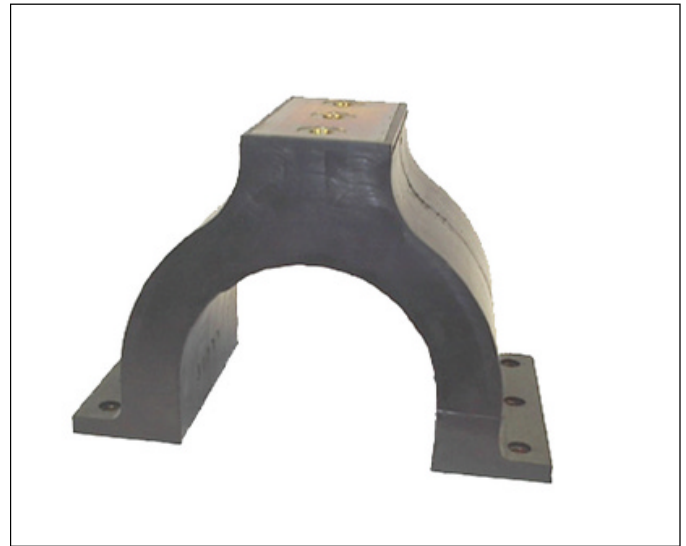

Applications

- COTS shipboard electronics
- Attenuates MIL-S-901C and 901D shock
- Can be used as a base mount or stabilizer

