

Resilient Element	Part Number	Load Rating (lbs.)	Max Transmissibility
VHDS Silicone	CP65-S01	4	4
	CP65-S02	6	4
	CP65-S03	10	4
	CP65-S04	18	4
Neoprene	CP65-N01	4	10
	CP65-N02	6	10
	CP65-N03	10	10
	CP65-N04	18	10

Table 1: Performance Characteristics

**Materials:**

- Metal Parts: Stainless Steel
- Resilient Element: See Left

**Operating Temperature:**

- Silicone: -60°F to 300°F
- Neoprene: -20°F to 180°F

**Natural Frequency:**

- 20 to 40 Hz

**Axial/Radial Frequency Ratio:**

- 1 : 1 Approximately

**Weight:**

- 1 oz

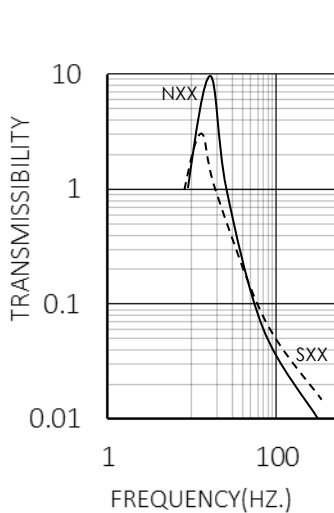


Figure 1: Transmissibility Curve

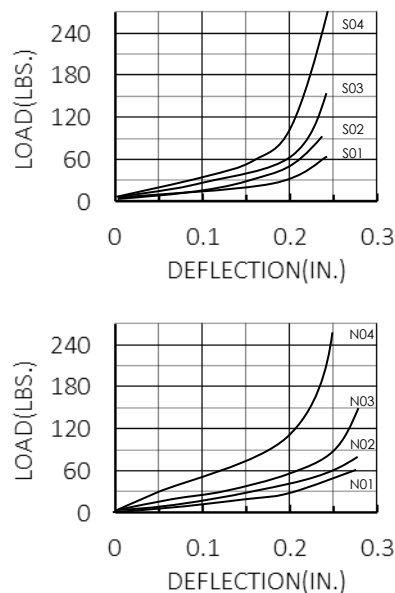


Figure 2: Load Vs. Deflection

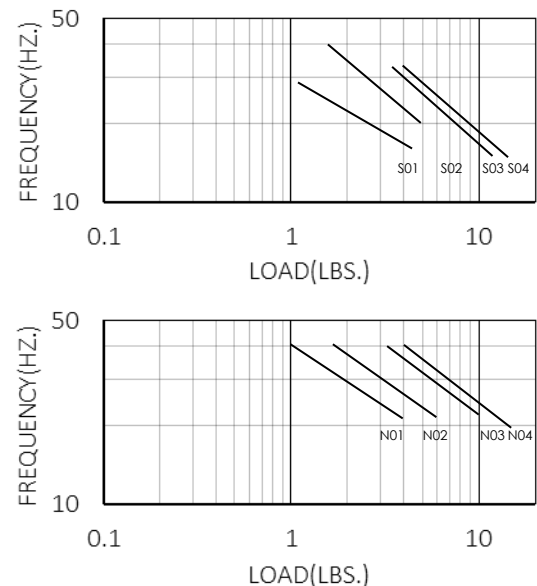


Figure 3: Frequency vs. Load