


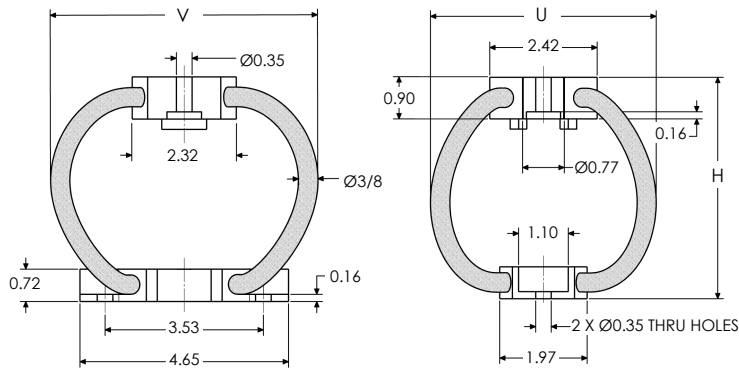

Part Number	Dimensions (in.)			Load Mode	Shock Isolation	
	H	U	V		Average Stiffness (lbs/in)	Max Dynamic Deflection (in.)
ICM13-175	3.0	3.2	4.6	45 Degrees	98	1.7
				Compression	227	1.1
				Shear/Roll	181	1.2
ICM13-235	3.5	3.8	4.9	45 Degrees	47	2.4
				Compression	110	1.6
				Shear/Roll	87	1.7
ICM13-270	4.0	4.0	5.2	45 Degrees	34	3.1
				Compression	79	2.1
				Shear/Roll	66	2.2
ICM13-345	5.0	4.9	5.7	45 Degrees	16	4.6
				Compression	38	3.0
				Shear/Roll	33	3.2

Materials:

- Cable: Stainless Steel [Standard]
- Retainer Bars: Aluminum Alloy

Operating Temperature:

- -290°F to 570°F

Table 1: Values for Dimensions in Drawing & Performance Characteristics

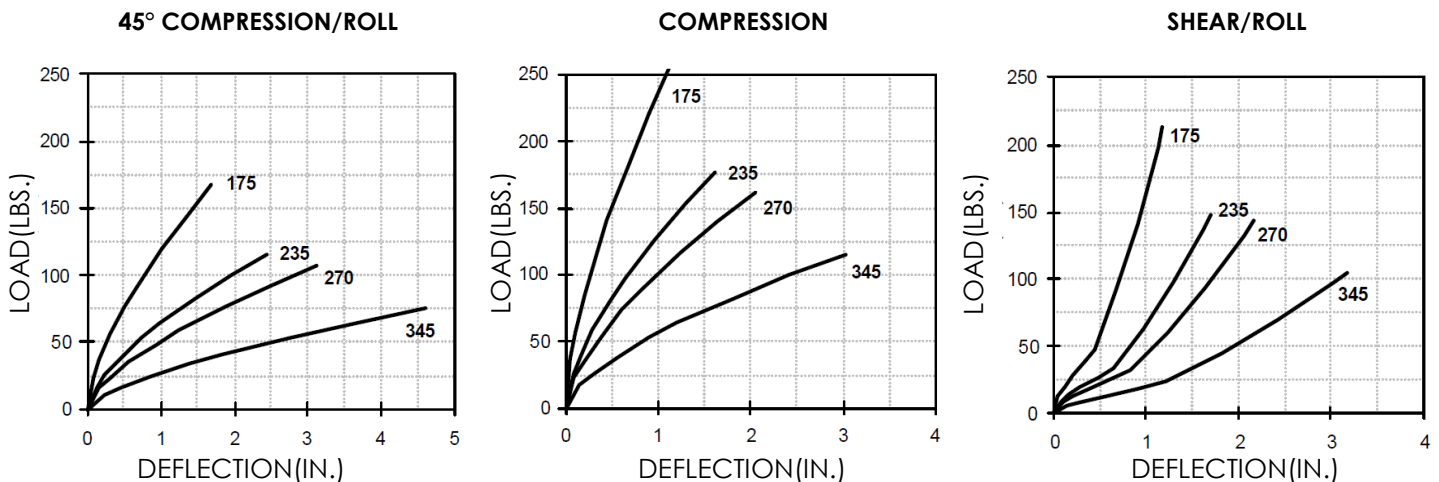


Figure 1: Load Vs. Deflection in each Load Mode