

Part Number	Dimensions (in.)			Load Mode	Shock Isolation	
	H	U	V		Average Stiffness (lbs/in)	Max Dynamic Deflection (in.)
ICM17-415	6.3	6.4	8.1	45 Degrees	203	4.6
				Compression	471	3.1
				Shear/Roll	367	3.2
ICM17-515	7.5	7.6	8.4	45 Degrees	118	6.4
				Compression	274	4.2
				Shear/Roll	237	4.4
ICM17-615	8.7	8.1	9.1	45 Degrees	76	8.1
				Compression	177	5.3
				Shear/Roll	154	5.6
ICM17-715	9.8	9.3	9.8	45 Degrees	53	9.8
				Compression	122	6.4
				Shear/Roll	106	6.7

Materials:


- Cable: Stainless Steel [Standard]
- Retainer Bars: Aluminum Alloy

Operating Temperature:


- -290°F to 570°F

Table 1: Values for Dimensions in Drawing & Performance Characteristics

45° COMPRESSION/ROLL

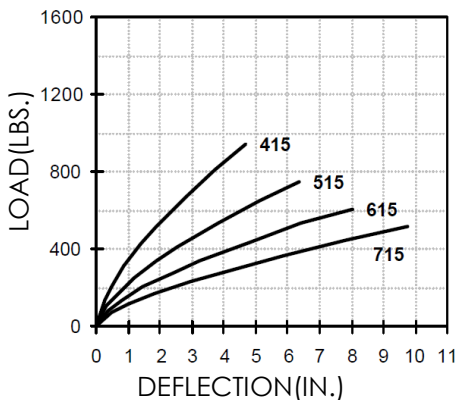

COMPRESSION

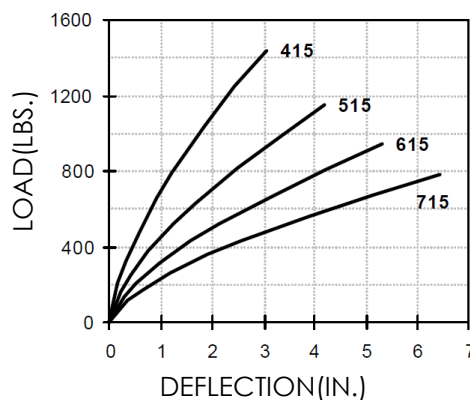

SHEAR/ROLL

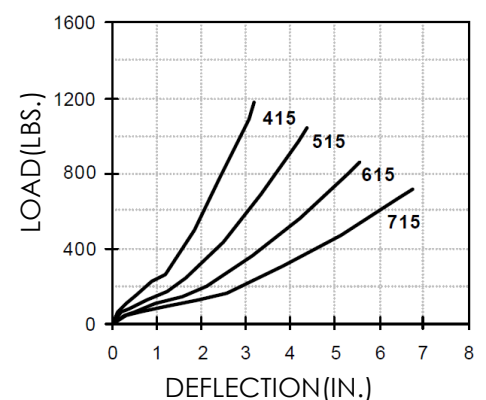


Figure 1: Load Vs. Deflection in each Load Mode