


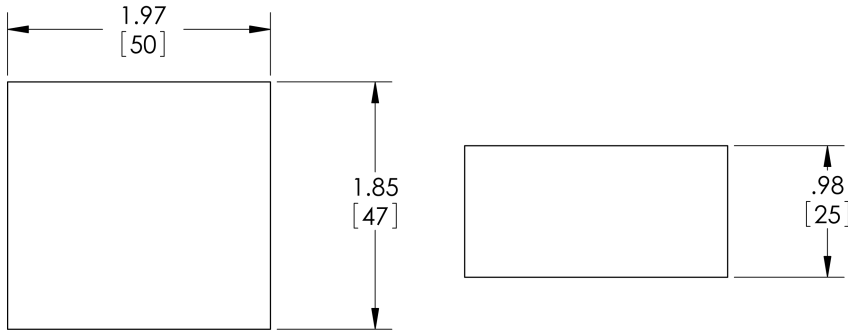

Pipe Diameter (in.)	Number of Cushions	Pipe Diameter (in.)	Number of Cushions
2.95 — 3.55	5	12.00 — 13.40	20
3.55 — 4.15	6	13.40 — 14.95	21
4.15 — 4.75	7	14.95 — 16.15	24
4.75 — 5.30	8	16.15 — 17.75	27
5.30 — 5.90	9	17.75 — 19.70	28
5.90 — 6.70	10	19.70 — 22.00	31
6.70 — 7.25	11	22.00 — 24.80	35
7.25 — 7.85	12	24.80 — 27.55	39
7.85 — 8.65	13	27.55 — 31.10	44
8.65 — 9.45	14	31.10 — 34.65	49
9.45 — 10.65	15	34.65 — 38.75	55
10.65 — 12.00	17	38.75 — 43.30	61



Table 1: Performance Characteristics

Materials:

- Stainless Steel

Operating Temperature:

- -100°F to 700°F

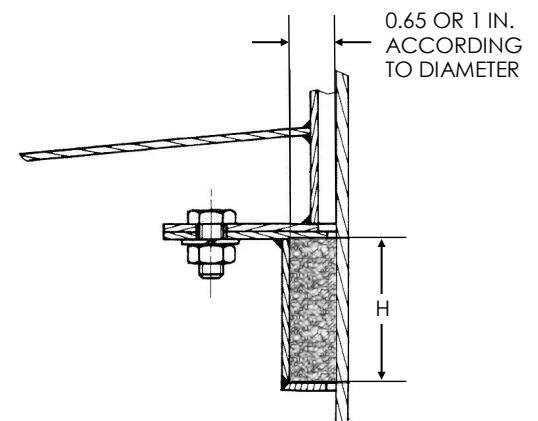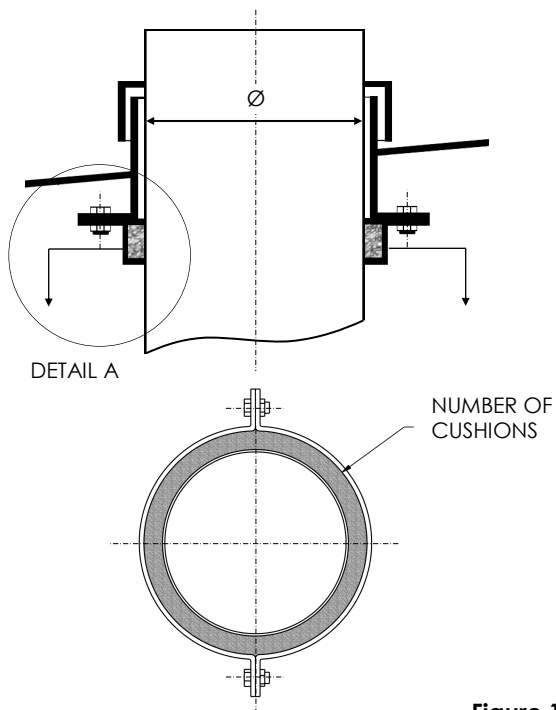

"DETAIL A"

ALLOWS FOR PACKING
PIECES BETWEEN THE HALF
RINGS FOR FURTHER
CLAMPING

Figure 1: WM700 Installation